

SALDFLUXMATIC DISPENSER FOR LIQUID FLUX

The Saldfluxmatic® Process utilizes equipment to dispense Liquid Flux with the fuel gas. The Saldfluxmatic® consists of a mixing chamber and a reserve tank for flux storage. The unit can be easily added to any existing manual or automatic brazing installation and does not require special torches, tips or unusual connections.



SALDFLUXMATIC® 1

This is a entry level model. It is suitable for Oxygen and Methane. This model has no valve adjustment to regulate the amount of liquid flux introduced into the flame.

It has no possibility to use it without the liquid flux. There are 2 types. One with working tank only (2lt) and one with also Reserve tank (5lt).

The units are our "base" Models and additional features can be added to suit one's particular brazing application. Please consult with Saldflux Srl for any added features to the base Models.

Number of torches max.: 1



SALDFLUXMATIC® 2

It is suitable for Oxygen and Methane.

This model has a valve adjustment to regulate the amount of liquid flux introduced into the flame.

It can work with liquid flux but also without flux.

There are 2 types. One with working tank only (2lt), and one with also Reserve tank (5lt).

The units are our "base" Models and additional features can be added to suit one's particular brazing application. Please consult with Saldflux Srl for any added features to the base Models.

Number of torches max.: 1

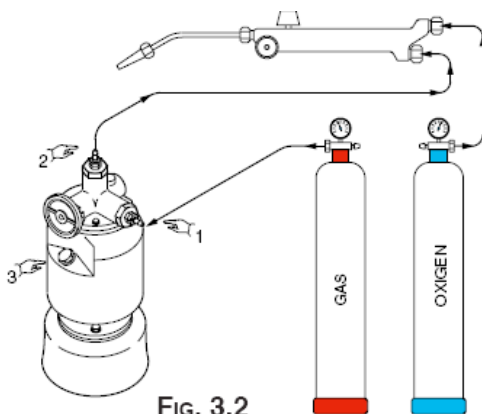


FIG. 3.2

Contact us at 02.90.78.18.12 or by e-mail at info@saldflux.com to get more information !!!!